



3-Way/5-Way



Model	Connection	Length
3TA	G1"	70, 80, 90
5TA	G1"	70, 80, 90
5TB	G1"	70, 80, 90

Foot Valve



Model	Connection
FVA1	1"
FVA1.25	1 1/4"
FVA1.5	1 1/2"
FVA2	2"
FVA3	3"

- Stainless steel mesh
- Can be used as a check valve

Flexible Hose



Model	Connection
FH12-8-01(L=128mm)	G1/2"
FH44-03(L=440mm)	G1"
	G1"
	Stainless steel wire
	Stainless steel wire
	Fluid temperature up to 35°C;
	Maximum ambient temperature 40°C.

Filter



Model	Connection
WF-01A	1" x 1"
WF-02A	1" x 1"
1L	2L
5bar	5bar
	Fluid temperature up to 35°C;
	Maximum ambient temperature 40°C.

Model	Max. Pressure	Nominal Capacity	Actual Capacity	Membrane	Max. Temp	Connection
2VT	8	2	2	EPDM	99°C	G1/2"
4VT	8	4	4		99°C	G1"
8VT	8	8	8	N.R	60°C	G1"
19VT	8	19	17		99°C	G1"
24VT	8	24	20		99°C	G1"
24VT	8	24	24		99°C	G1"
36VT	8	36	36		99°C	G1"

The service life of the membrane is 50,000 cycles.

Pressure Switch



PS-02B

- High precision
- High sensitivity
- Adjustable pressure range 1,4–5,6 bar
- G1/4"



PS-02C

- High precision
- High sensitivity
- Adjustable pressure range 1,4–5,6 bar
- G1/4"

Electromagnetic Switch



PS-04A

RATED VOLTAGE	220V~240V/110V~120V
FREQUENCY	50/60Hz
MAX. CURRENT	10A
MAX. POWER	1,1kW/1,5kW
STARTING PRESSURE SETTING	1,2bar/1,5bar/2,2bar
MAX. OPERATING PRESSURE	10bar
CONNECTION THREAD	G1"
PROTECTION CLASS	IP65
MAX. OPERATING TEMPERATURE	60°C
CABLE REQUIREMENT	Cable diameter 7,5–9mm



PS-04B

RATED VOLTAGE	220V~240V/110V~120V
FREQUENCY	50/60Hz
MAX. CURRENT	10A
MAX. POWER	1,1kW/1,5kW
STARTING PRESSURE SETTING	1,2bar/1,5bar/2,2bar
MAX. OPERATING PRESSURE	10bar
CONNECTION THREAD	G1"
PROTECTION CLASS	IP65
MAX. OPERATING TEMPERATURE	60°C
CABLE REQUIREMENT	Cable diameter 7,5–9mm

Optional: Working pressure adjustable



PS-04C

RATED VOLTAGE	220V~240V/110V~120V
FREQUENCY	50/60Hz
MAX. CURRENT	10A
MAX. POWER	1,1kW/1,5kW
STARTING PRESSURE SETTING	1,5bar/2,2bar
MAX. OPERATING PRESSURE	10bar
CONNECTION THREAD	G1"
PROTECTION CLASS	IP54
MAX. OPERATING TEMPERATURE	60°C
CABLE REQUIREMENT	Cable diameter 7,5–9mm


Pressure Gauge



Radial



Axial

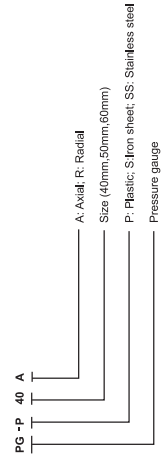

- Two connection types: (1)G1/4" (2)M10×1
- For 40mm gauge, the scale: 0-6 bar
- For 50mm gauge, the scale: 0-10 bar or 0-6 bar
- Backbottom connection

Accessories

Capacitor

2 wires



2 (4) terminals



Capacity (µF)	Type	Diameter (mm)	Length (mm)
6	2 wires	32	66
8	2 wires	32	66
8	4 terminals	35	72
10	2 wires	34	62
10	4 terminals	35	72
12	2 wires	40	73
16	2 wires	42	71
16	4 terminals	42	73
20	2 wires	42	74
20	4 terminals	42	74
25	2 wires	42	82
35	4 terminals	42	70
40	2 wires	42	82
40	4 terminals	45	73
42.5	2 terminals	51	100
45	2 terminals	51	100
50	2 terminals	51	100

Float Switch



FLO-01

FLO-01 (With balance block)

Model	FLO-01	FLO-01 (With balance block)
Specification	5(4)250V 10(8)125V	5(4)250V 10(8)125V
Cable	H07-RN-F 3G1x0.5m	H07-RN-F 3G1x0.5m
Lifetime	5000 cycles	5000 cycles
Operating Limits	Fluid temperature up to 35°C; Maximum ambient temperature 40°C.	

Commercial Pumps

CONTENTS



• Stainless Steel Vertical Multistage Pump



• Stainless Steel Vertical Multistage Pump



• Stainless Steel Horizontal Multistage Pump



• Stainless Steel Horizontal Multistage Pump



• Stainless Steel Centrifugal Pump



• Vertical In-line Pump



• Standard Centrifugal Pump



• Bare Shaft End Suction Centrifugal Pump



• Circulation Pump



• Submersible Dewatering Pump



• Submersible Sewage Pump



• Pressure Booster System